

CARRI SOCCORSO

BREAKDOWN TRUCKS

ABSCHLEPPWAGEN

DÉPANNÉUSES



SVE 18 NEW





isoli@isoli.com | www.isoli.com







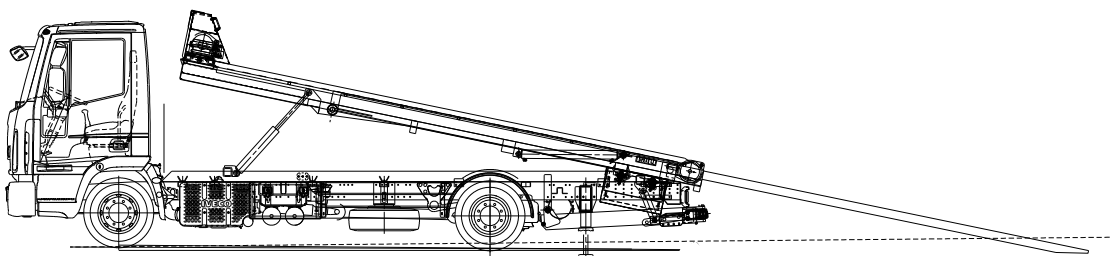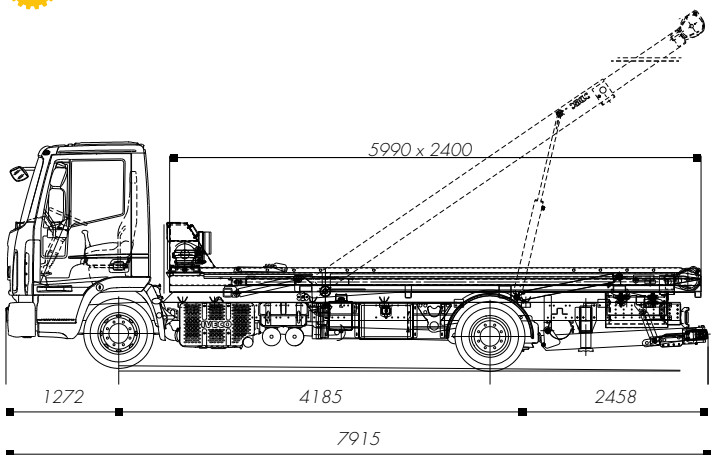

DIMENSIONI / OVERALL DIMENSION / GESAMTABMESSUNGEN / DIMENSIONS [mm]



CARATTERISTICHE TECNICHE / TECHNICAL FEATURES / TECHNISCHE EIGENSCHAFTEN / DETAILS TECHNIQUES

 <p>Portata del verricello Front winch Leistung der Winde Treuil</p>	5.200 kg
 <p>Portata del braccio sollevabile Lifting boom capacity Traglast des Hubarms Charge utile du bras de levage</p>	5.500 kg
 <p>Portata della forca Fork capacity Traglast der Hinterradgabel Charge utile de la fourche</p>	2.500 / 3.000 KG (MTT 120 / 150 Q.li) 2.500 / 3.000 KG (MTT 120 / 150 Q.li) 2.500 kg / 3.000 kg (zGM 120 / 15 t) 2500 / 3000 kg (MTT 120/150 quintaux)
 <p>Pianale Flatbed Flachbett-Abmessungen Plateau</p>	6.000 / 6.300 x 2.400 mm, Slide di carico L= 750 mm, Portata tecnica 6.000 Kg 6.000 / 6.300 x 2.400 mm, Loading slab L= 750 mm, Technical scope 6.000 Kg 6.000 / 6.300 x 2.400 mm, Schiebeplateau L= 750 mm, Tragfähigkeit 6.000 Kg 6000 / 6300 x 2400 mm Coulisse de chargement L = 750 mm, charge utile technique 6000 kg